

statisticsWeights



RSC 9200 **Removal scale**

Increase in productivity by more than 50%

- Contraction of the second se

Maximum reduction of giveaway

Optimized and gentle packaging process

Mobile and ergonomic construction










Precise weighing creates the conditions for an optimal, efficient, fast and simple packing process.

The high-resolution removal scale RSC9200 ensures exactly this: using the principle of picking out a total amount of goods, allows to portion optimal units of products. From the box on the scale the predefined partial quantity is removed and placed in the sales packaging. An intuitive touch display helps the operator to portion quickly and accurately to the gram. This reduces the giveaway to a minimum and enables an increase in productivity by 50%.

As a result, it is possible to achieve a halving of the packing times and a significant increase in the weighing accuracy of products from the food industry. The personnel time recording of the employees is carried out simply by registering on a transponder reader integrated in the scale. Integrated into the WLAN network, each scale transmits the weight data and personnel time to the central TopControl software.



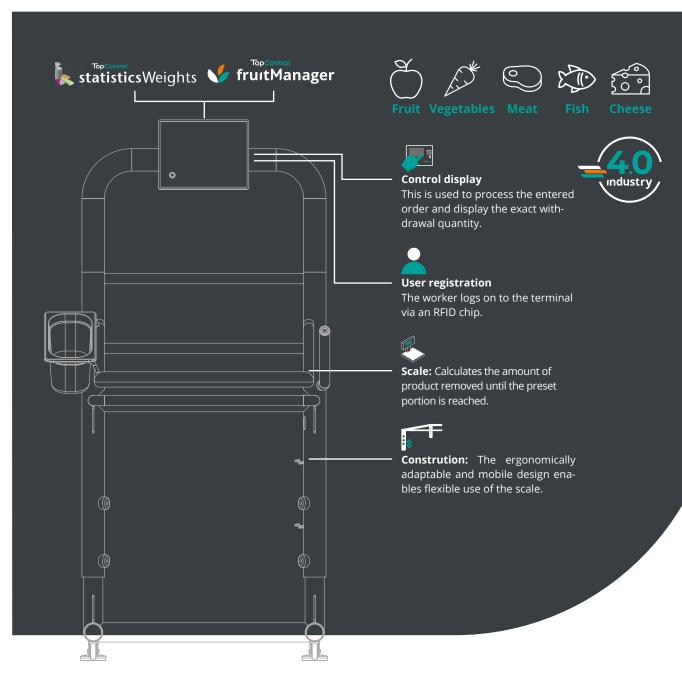









Increase in productivity by more than 50%

Profit maximization



ROI within 3-12 months



Increase in productivity by 50%



Mobile and ergonomic construction - IP67



Easy integration into the packaging process



goods



Packing according to Dynamische WELMEC 6.4/e for pre-packed Gewichtsgrezregelung



Intuitive touch display with integrated transponder reader for working time recording



Equalising or withdrawal weighing can be defined per article




Complete control and registration of weight and performance data through the TopControl software


TECHNICAL PROPERTIES


Dimension (L/W/H)	889 mm x 1042 mm x 1595 mm (+250 mm)
Load capacity/division	20 kg/1 g - 30 kg/2 g
Protection class	IP67
Power supply	220V
Interfaces	Ethernet 10 base T, TCP/IP, RS 232, RS 422 und WLAN 2.4GHz
Maximum box size	600x400x216 mm
Display	Colour LCD touch display 7 inch
(!) Non-verifiable scales - for internal use	




Technical drawings











Optimised for herbs and light vegetables.






vegetables




Technical drawings


Ø_120

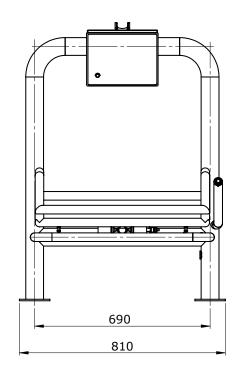

1.

618







Optimised for herbs and light vegetables.





vegetables



